

PRODUCT INTRODUCTION

DIGITAL CONFERENCE SYSTEM PRODUCTS

CR-DIG5202/04A2


The hidden-mic LCD discussion voting unit



The hidden-mic LCD discussion voting chairman unit
CR-DIG5202A2



The hidden-mic LCD discussion voting delegate unit
CR-DIG5204A2

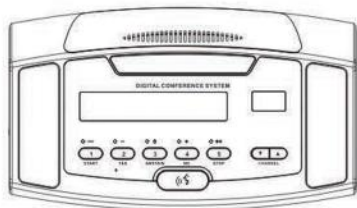

Size(mm):
255.7(L)X156.3(W)X67.3(H)

Product overview

CR-DIG5202/04A2 has built-in microphone, set a variety of techniques like discuss and discuss management, attendance and attendance management, voting and voting management, electronic nameplate display, simultaneous interpretation, tea, short message, and internal communication as a whole. Built-in hi-fi speaker can satisfy the small venue PA demand.

Function characteristics

- Electronic nameplate display: 320x64LCD display, used for identity information display, support the scroll left/right screen display or a separate display of names and positions, supports text adaptive amplification, provides the best visual effect. Maximum support 8 Chinese characters, 16 English letters and Russian, Japanese and other languages.
- The entire system of all namedisplay synchronized in scroll, left/right scrolling.
- Solve the displaying problem of rare Chinese characters.
- Support PC software or plug-in IC card electronic nameplate display.
- High speed and high bandwidth to transmit information; PC software is capable of 1000 sets of CR- DIG5202/04A2 electronic nameplate display content delivery in one second.
- Built-in high sensitivity microphone.
- Support the contact IC card attendance and automatic acquisition of representatives.
- Support 31+1 simultaneous interpretation.
- Chairman unit has the priority function, can close or the speaking units.
- Chairman unit has the function to start or end the voting.
- Chairman unit can initiate 3-key vote (for / abstentions / against), or end the voting.
- 320x64 display provides clearly show about the number of microphones, attendance result, voting results.
- Offer tea application, short message view, short message tone, internal communication services.
- Support Chinese and English. Automatically unify language with the controller once power-on, support temporary modification of language.
- Support three vote modes:
 - voting: agree with / abstentions / against
 - election modes checking: 1/2/3/4/5
 - response / review mode: --, -, 0, +, ++
- You can save the identity information.

Specifications

The parameter name	CR-DIG5202/04A2		
Power supply	The controller power supply	Power of loudspeaker	2W
Frequency response	20Hz-20KHz	Headphone output	Earphone load >8 ohm
Signal-to-noise ratio	>80dB		Earphone volume 10mW
Channel crosstalk	>80dB	Display	Control display 320*64 dot matrix (blue and white)
The microphone parameters			Table display 320*64 dot matrix (blue and white)
Cartridge type	Capacitive heart type single direction	Total harmonic distortion	<0.05%
Sensitivity	-46dB/1pa	Maximum power dissipation	2.2W
Frequency response	20Hz-20KHz	Unit interface	8 core aviation head
Input impedance	2.2K	Color	Silver